

Capacitive touch screen control panel



CT-ETWF3014-YD

Introduction

Capacitor screen touch control panel, used special high-end of glass material, fresh transparent, be elegant of acrylic panel and the metal drawing outside box,800*680 HD displayed, color gorgeous, Super Visual enjoy;G+G5 points touch capacitor screen touch operation perfect experience; operation interface rich, unique of background light displayed, master in any environment in the area can operation freely, rendering out noble fashion of art atmosphere, Is the music industry's top a plain touch capacitive touch screen control panel.

Technical Information

- Capacitive touch screen control panels, brushed metal appearance
- 800*680 HD display,G+G5 -touch capacitive touch screen
- Rich interface, unique background light show in support of operations in any environment

Specifications

- Working voltage: 5V Hosting offer
- Grain :800*680 HD display
- Touch screen:G+G5 -touch capacitive touch screen
- Music mode: EQ smart regulation
- Timer function:4 time
- Menu functions: menu song, at a glance

- Housing color: Pearl White-midnight black
- Dimension: 140 mm (W) x 86 mm (L) x 10 mm (H) (End of cartridge installation)

Operation

Panel access settings

CT-ETWF3014-YD Panel wiring power, press the power button to enter boot interface and then "settings" interface "Advanced Setup" initial password:2012, Panel number is set to 0 or 1. Other parameter settings are not valid.

Installation Instructions

1. Prepare the following items before installing:

- 1) Five types of network cables × 1
- 2) Four-core cable (0.5Square) × 1

2. Refer to figure 1, All interfaces of the device description;

Interface description:

LAN: Use a network cable to connect the intelligent power amplifier and the Lan port on the host

Intelligent connection of the power amplifier and touch panel: four-wire connection

- GND – KEYPAD
Red - Output to KEYPAD-1
Yellow - Output to KEYPAD-2
Blue - Output to KEYPAD- 3
Black - Output to KEYPAD- 4



fig (a)

(PS : Four core cable access figure a As shown in From top to bottom, followed by the

black, blue, yellow and red, respectively, 4, 3, 2,1)

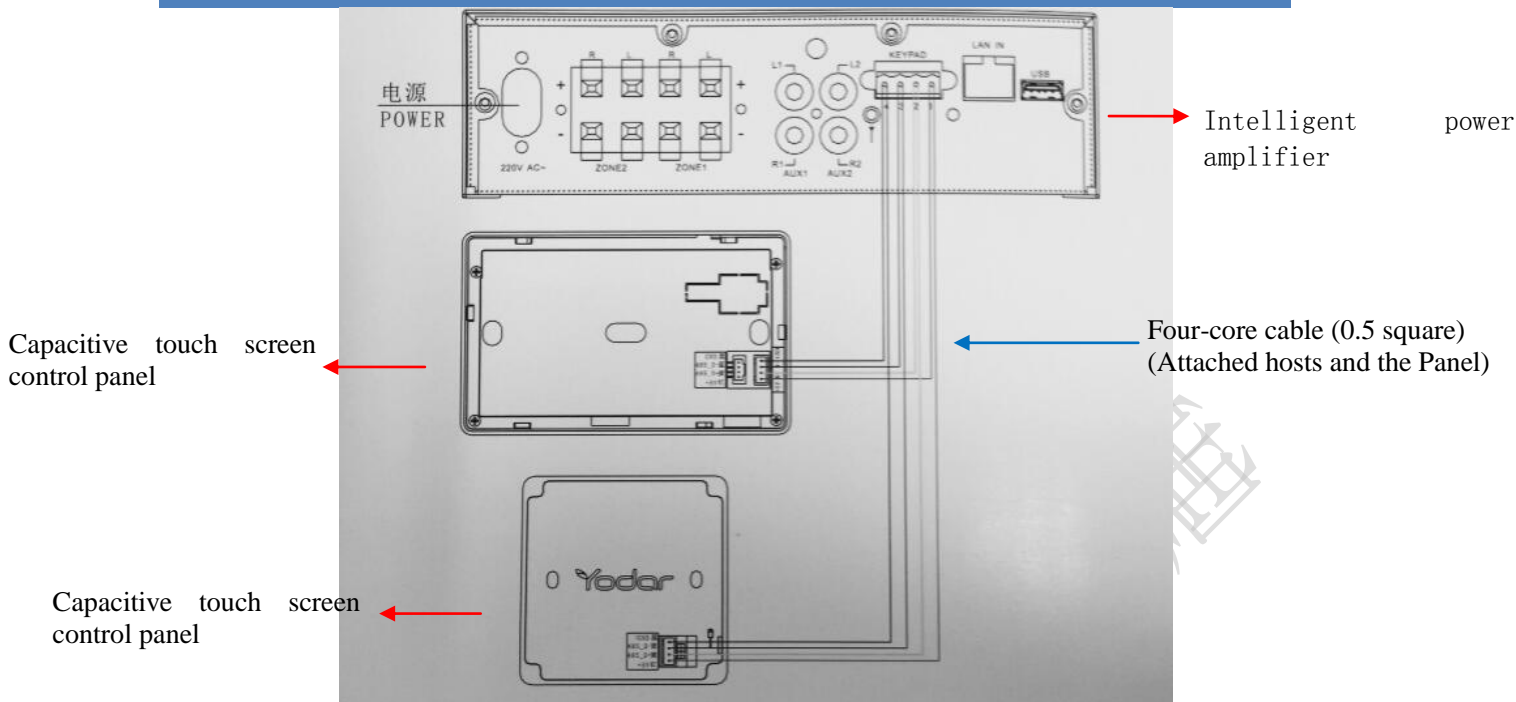


Fig1(CT-ETWF3014-YD Host and Panel wiring diagram)

Safety Notice

- Before installation , Verify the actual voltage meets the specifications for equipment, the device will be powered off, ensuring the safety of personnel and equipment;
- This product is not suitable for installation in environments where leakage or spill water;
- This product should not be installed in an environment of excessive dust;
- In order to ensure the sound, need to periodically use a soft brush to clean the loudspeaker